




## DX36 / Engine Dynamometer

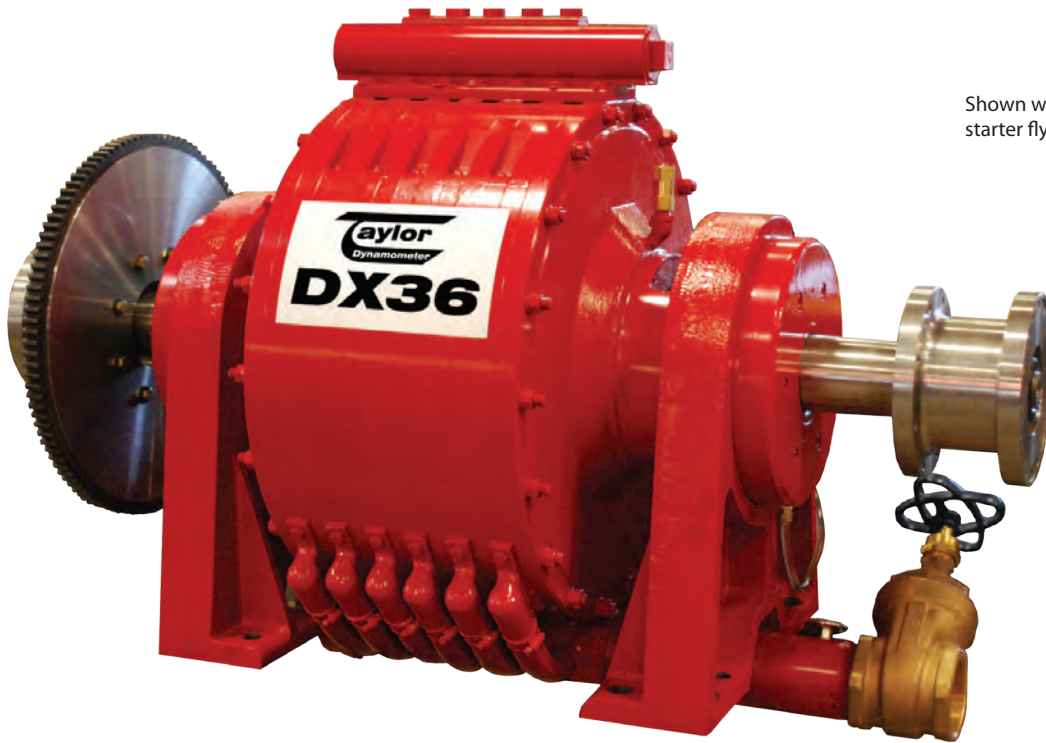

Shown with optional flanges and starter flywheel on shaft-ends.

## DX36 Water Brake Dynamometer

### Specifications

Power: 1,500 hp (1,119 kW)

Torque: 4,825 ft-lb (6,542 N)

Speed: 4,000 rpm

Water Use: 109 gpm (6.9 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 121.6 ft<sup>2</sup> · lb

Shipping Weight: 2,240 lb (1,016 kg)


Rotation: Dynamometer can be operated in both directions of rotation

### Recommended Accessories

- Driveshaft - 1810
- Torsional Coupling - 1810
- Adapter Plate Kit
- Shaft Guard
- Sub-Base Kit
- Engine Cart - 12,000 lb. (5,448 kg)
- Air Starter - High Torque, Single or Dual Directional
- Cooling Column - 4,250 hp (3,169 kW)
- Charge Air Cooler
- Water Recirculating System

**Total Test Success**

# Optional Accessories

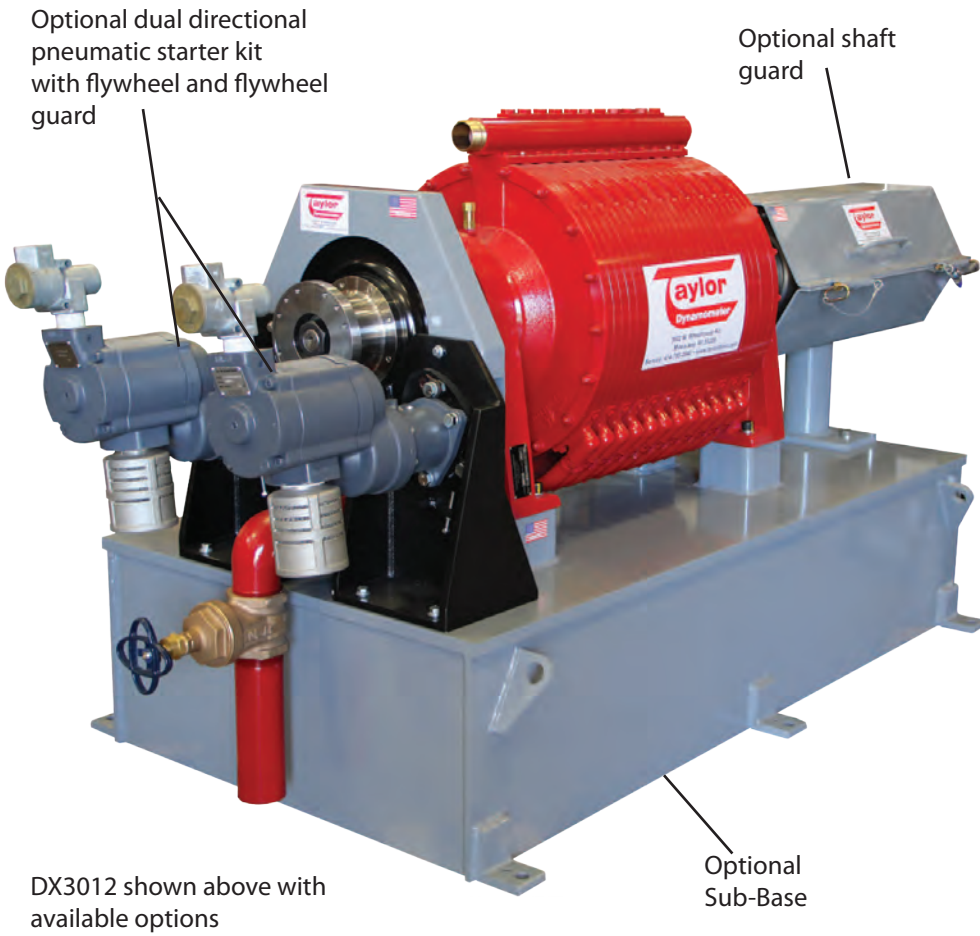

Optional Cooling Column



Optional Torsional Coupling




Optional Engine Cart (Engine not Included)




Optional Charge Air Cooler




### DX36 (English)

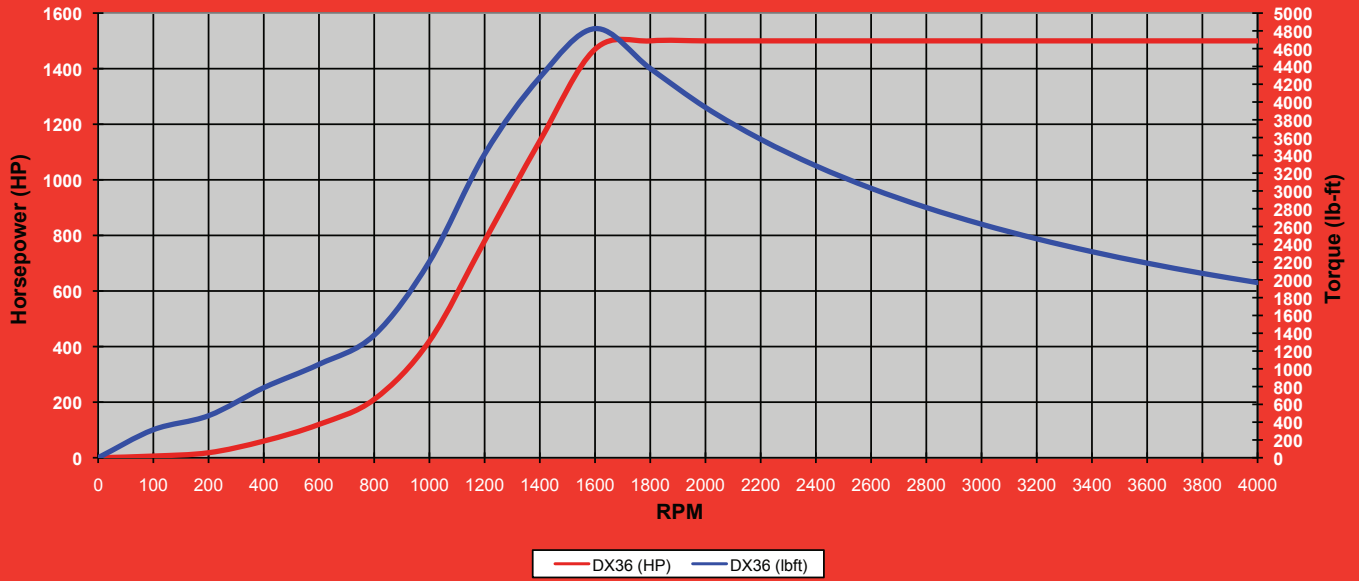

### DX36 (Metric)

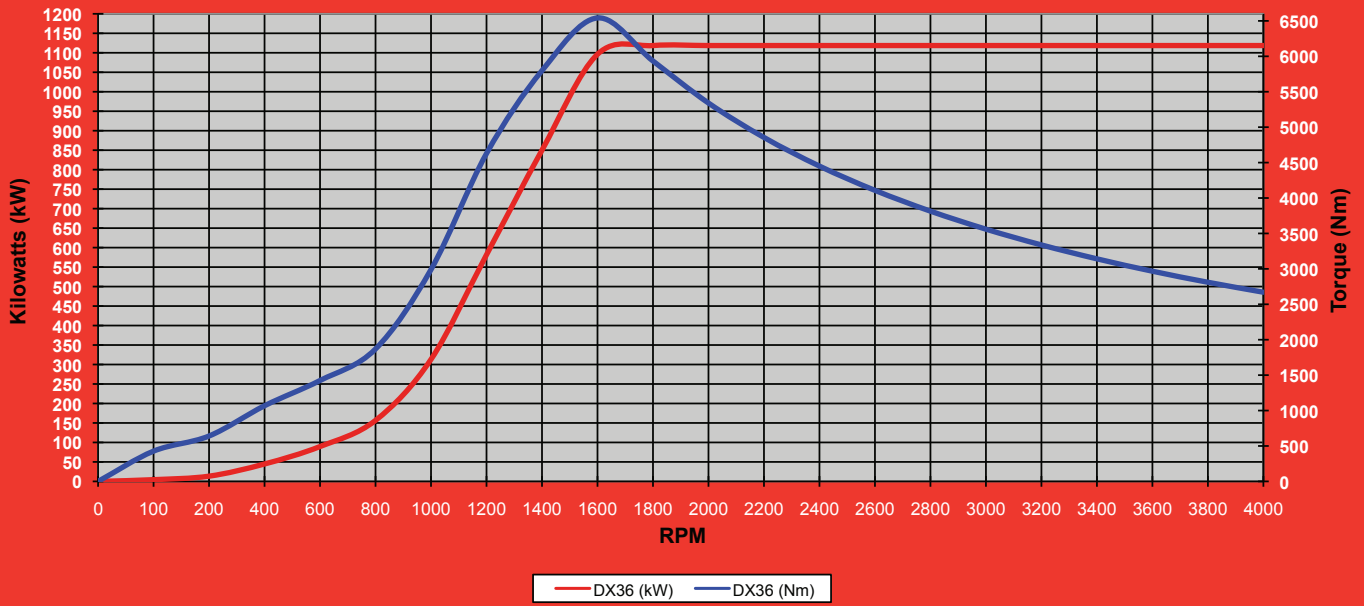

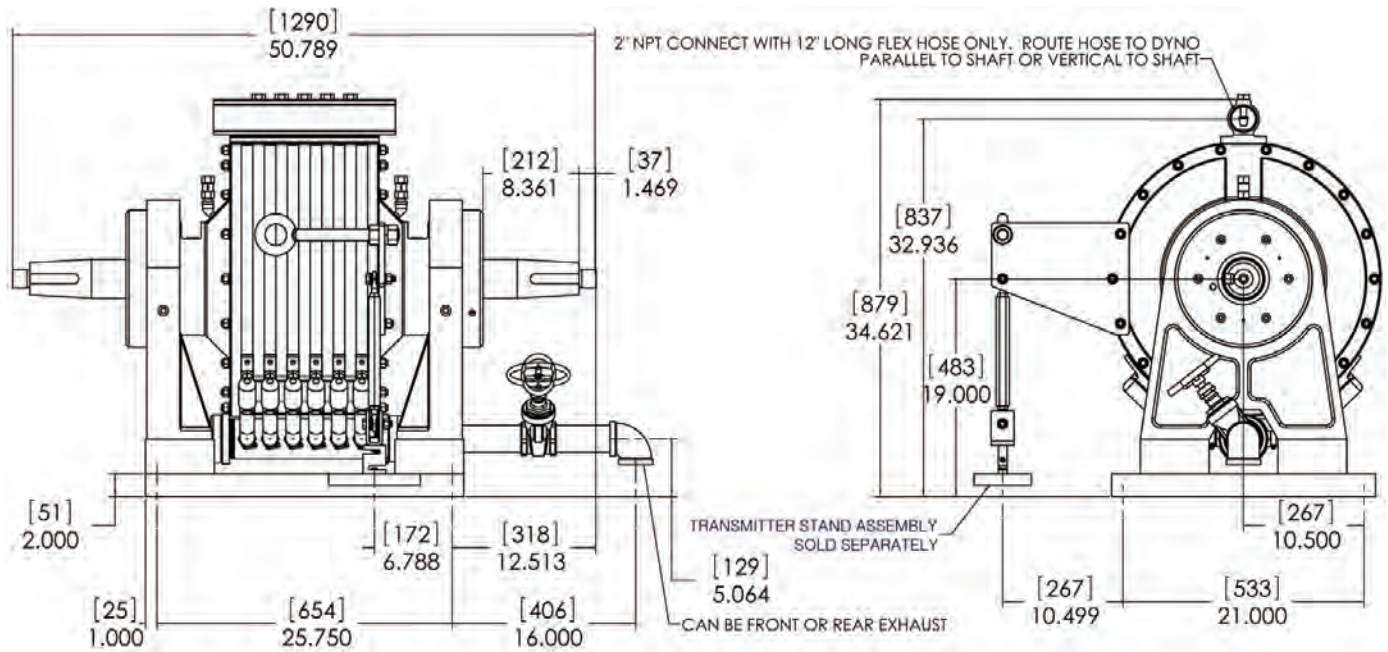

## Specifications

Power: 1,500 hp (1,119 kW)

Torque: 4,825 ft-lb (6,542 N)

Speed: 4,000 rpm

Water Use: 109 gpm (6.9 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 121.6 ft<sup>2</sup> · lb

Shipping Weight: 2,240 lb (1,016 kg)

Rotation: Dynamometer can be operated in both directions of rotation

*Everything you need to succeed*



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.  
 (414) 755-0040 [www.taylordyno.com](http://www.taylordyno.com)

SMS2014v004